


ROOF SYSTEM DEVELOPMENT

TILT INNER SLIDE



[FEATURE] Extremely short length occupied by the front mechanical section.
Ease of layout with other devices in the center of the front side.




Opening Size	
X	334 mm
Y	718 mm

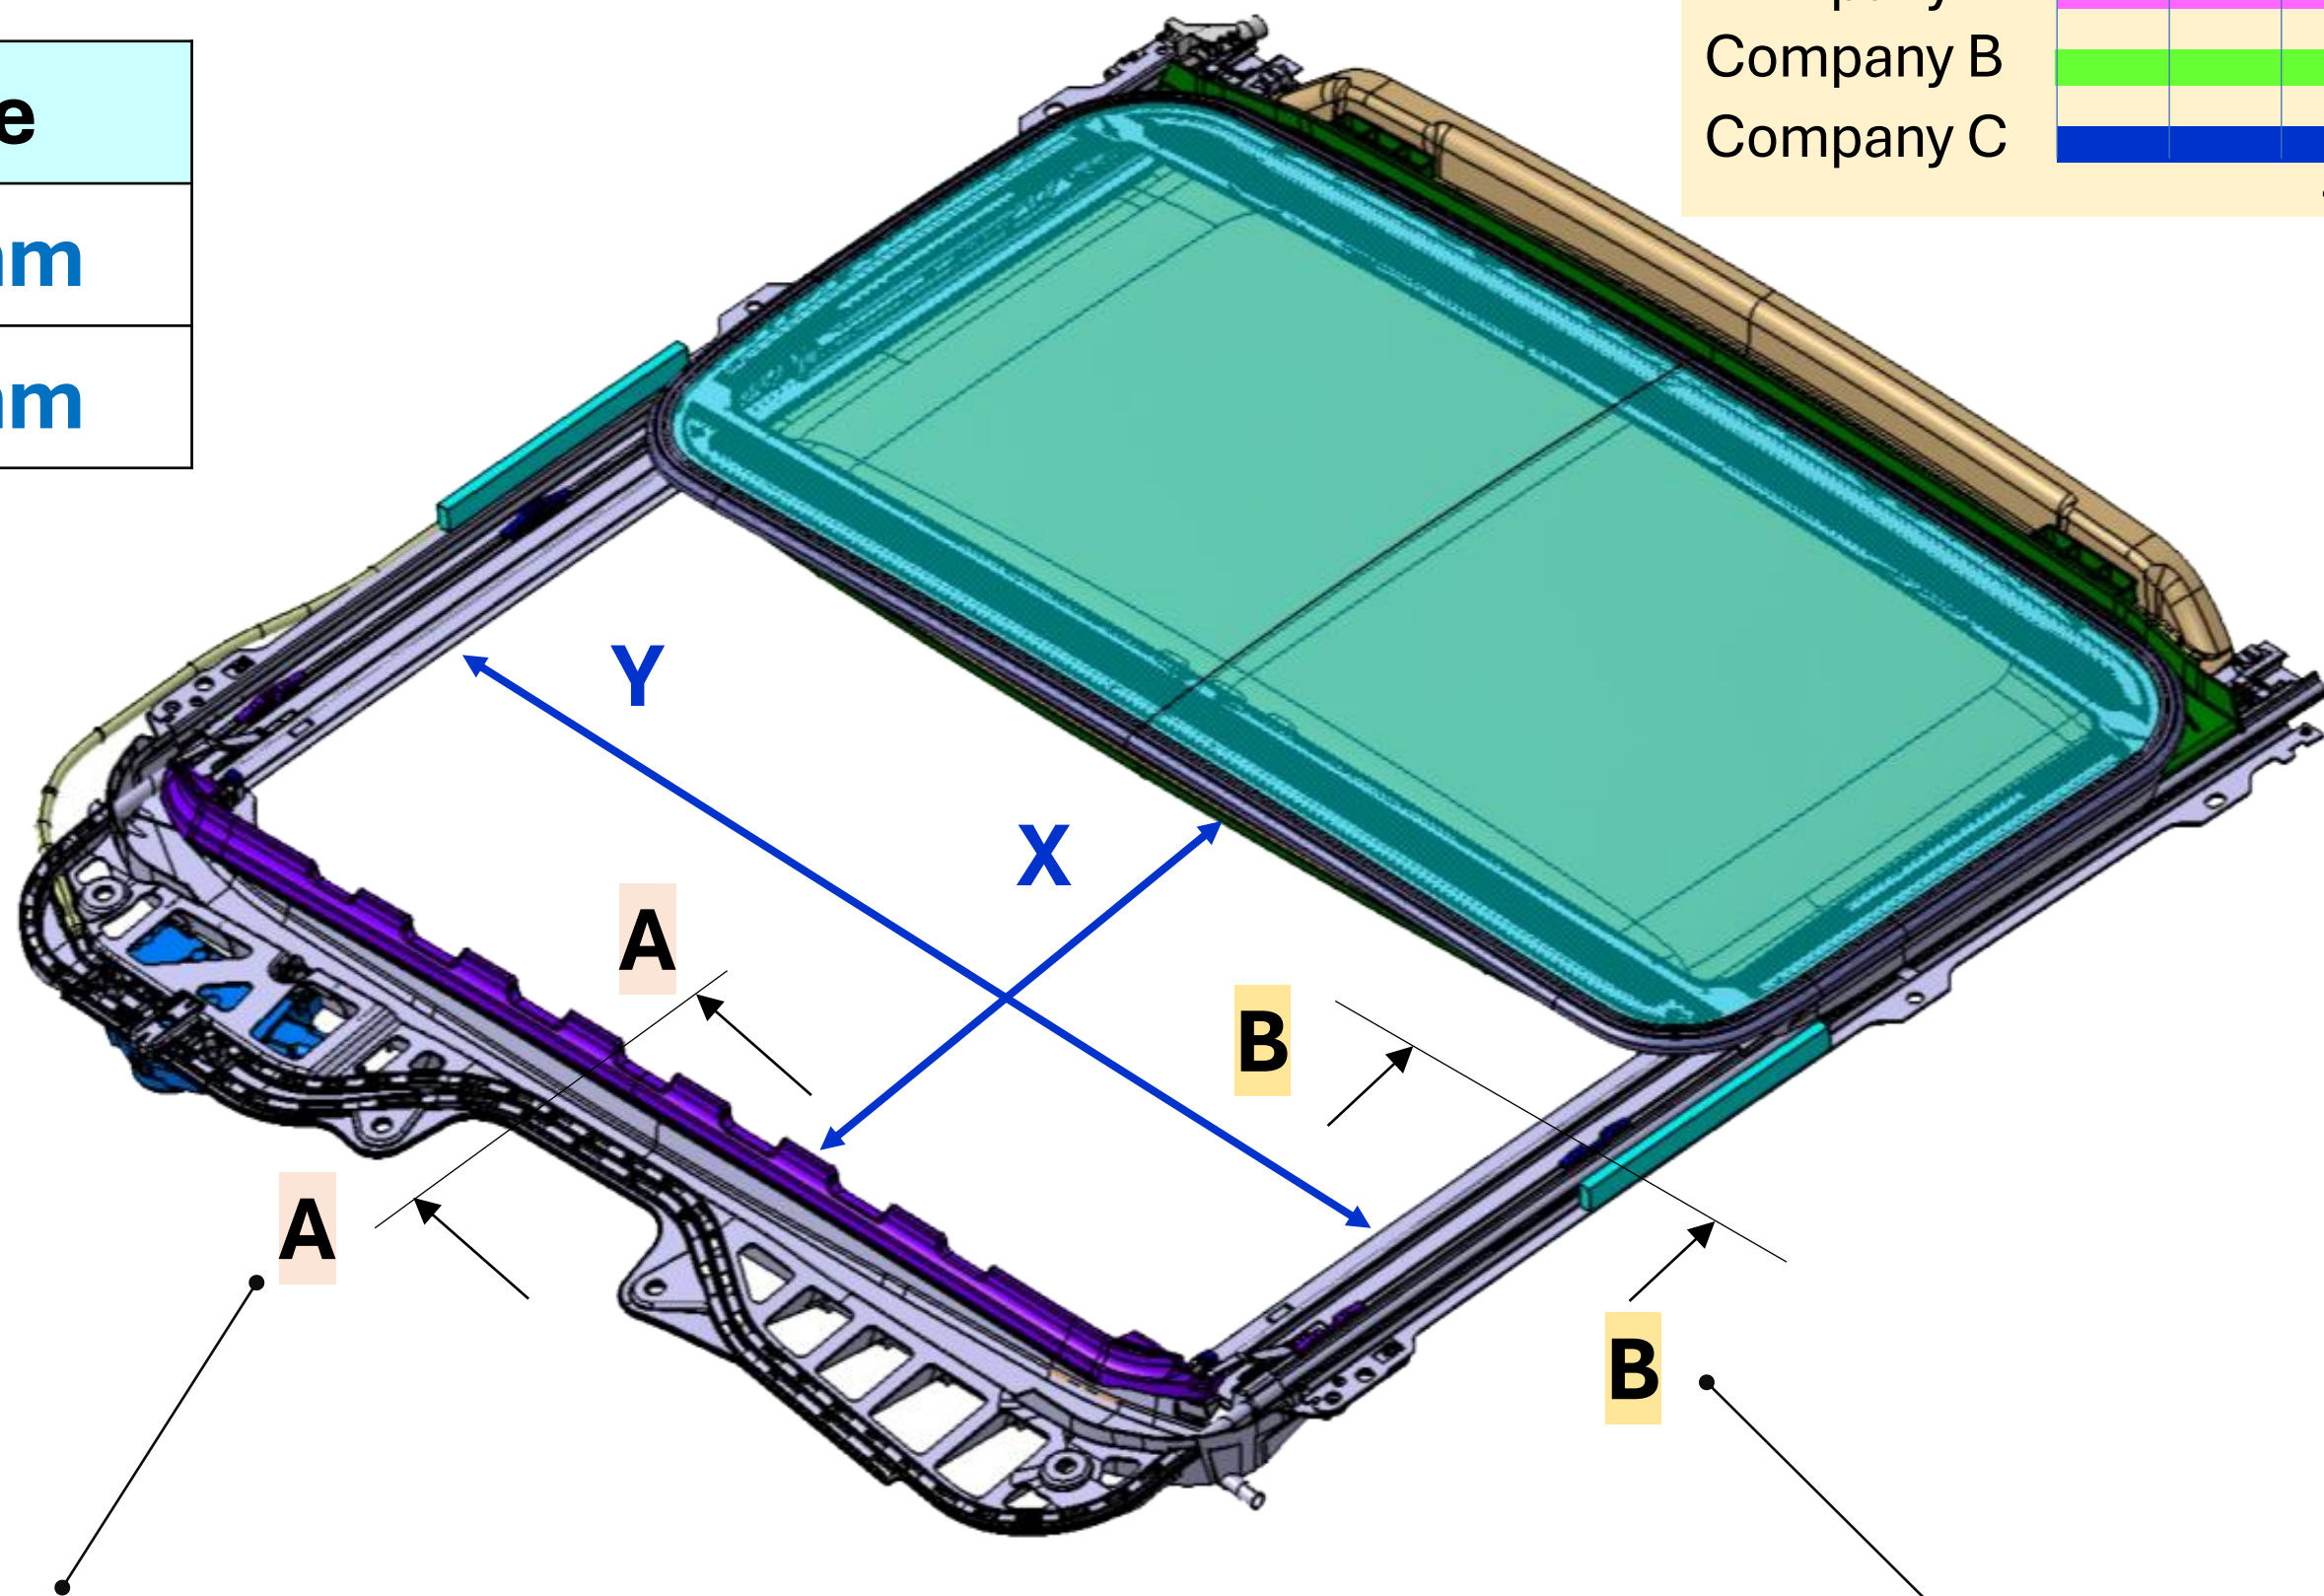

Competitiveness

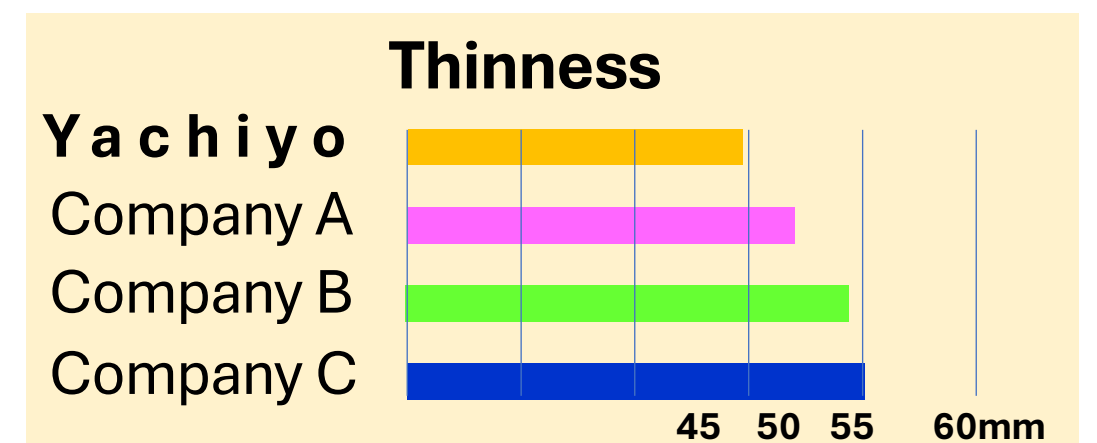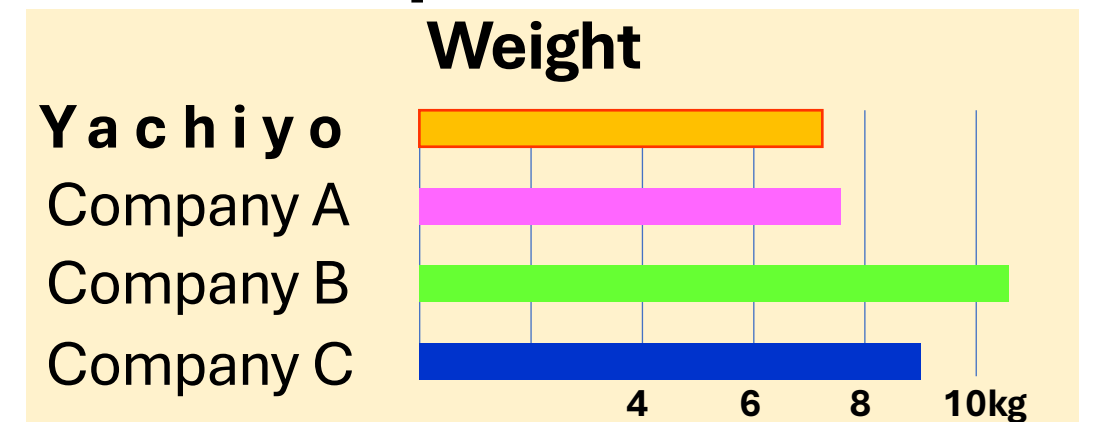


Opening Efficiency Between A and A

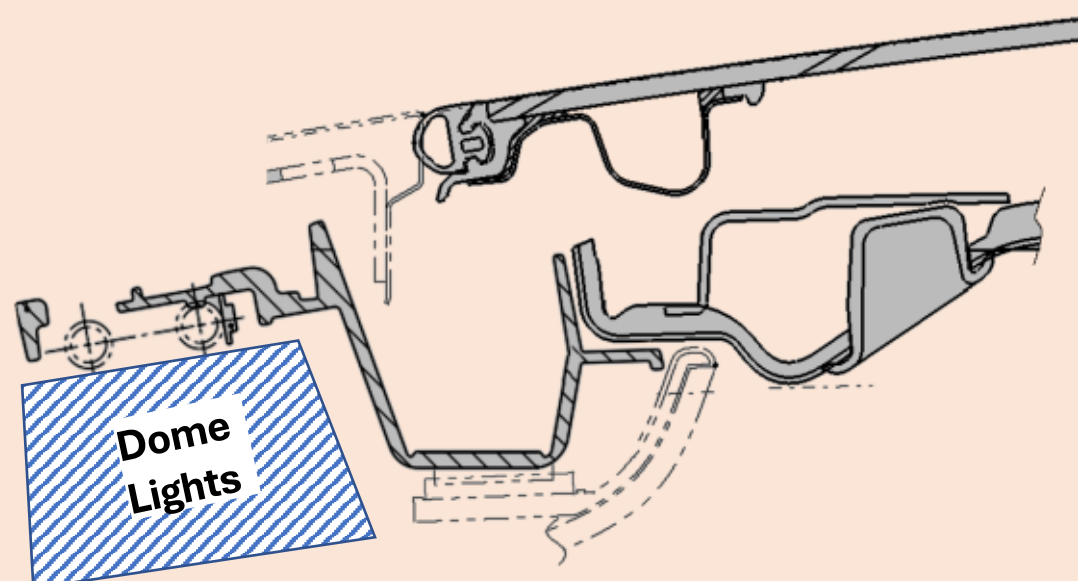

Optimal front opening position achieved by motor placement that avoids other device positions such as dome lights in the center of the front side to the side(PAT).

Thickness between B and B

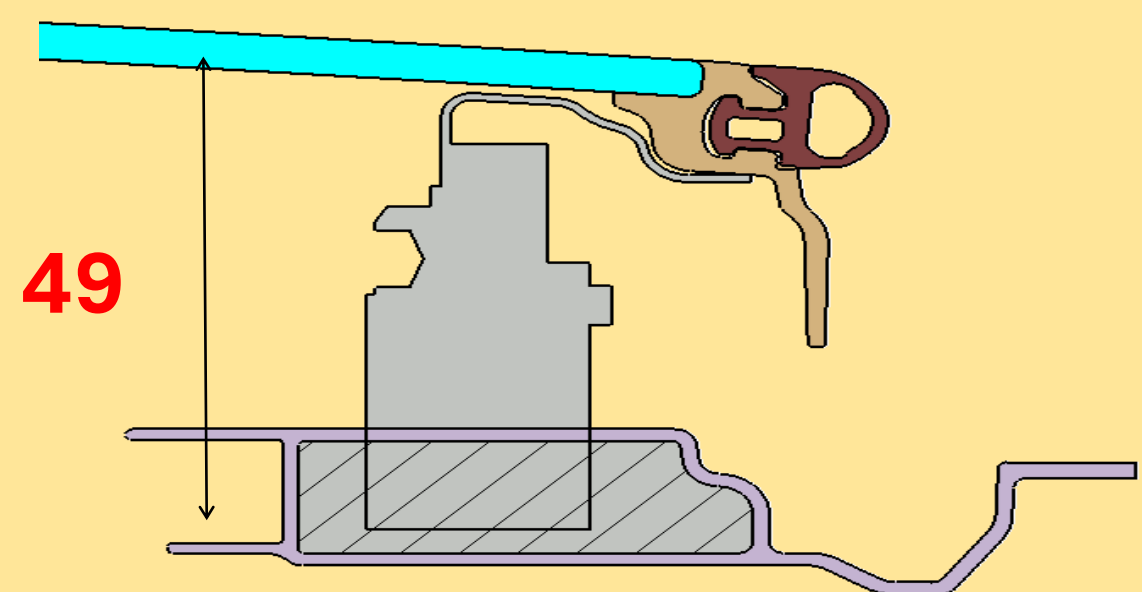

Top-level thinness achieved by minimizing and optimizing component placement.